

**JASA Packaging Solutions** stands for innovation, quality and flexibility in packaging technology. We specialize in developing and manufacturing vertical packaging machines, sleeves and complete weighing and packaging lines. Producers and packers of all kinds of food products around the globe trust our expertise, for almost 40 years, 24/7.

MODEL	JASA 400C
Mechanical capacity** (pack./min.)	120
Changeover time (min.)**	5-7
Electrical capacity (kW)	6
Electrical requirements	3x400VAC+N+PE, 50HZ (Europe standard) USA upon request
Necessary air pressure (bar)	6
Pneumatic capacity* (l/min.)	140
Compressed air specifications	ISO 8573-1:2010[7:4:4]
IP rating machine	IP66 or IP54
Sound pressure (dB(A))	78
Sound power lever (dB(A))	93
EC declaration	yes
Country of origin	the Netherlands
Customs tariff code	84223000
Packaging dimensions* (L*W*H)(mm)	3000 x 1.500 x 2.100
Nett weight* (kg)	1400
Packaging weight (kg)	1520
Film roll - max weight (kg)	60
Film roll - max diameter (mm)	600
Machine configuration	left/right

\* Exact capacity, dimensions and weight depend on the implementation of the machine.

\*\* The achieved capacity in the field depends on the actual product & film type and properties, bag length, portion size, infeed method operator efficiency and environmental conditions.



Headoffice:  
Visiting adress: Butter 17, 1713 GM Obdam (NL)  
Mailing & delivery: Kwelder 1, 1713 GN Obdam (NL)  
T +31 72 561 27 00  
E sales@jasa.nl  
W www.jasapackaging.com




All data, products and productspecifications are intended for general information only and subject to change without notice.



# PRODUCT DATA SHEET

## JASA 400C

The **JASA 400C**, part of the NXXT family, is revolutionary, innovative, and modular. Designed to meet our customers' highest expectations, it offers superior cleanability, flexibility, rapid changeovers, enhanced operator safety, energy efficiency, faster processing speeds, and improved serviceability.

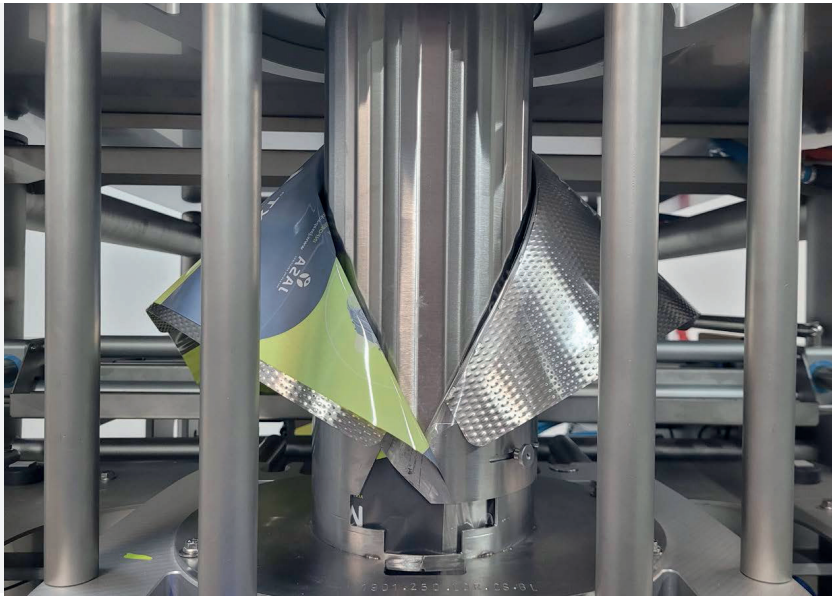

The machine is specially designed packaging of processed and frozen foods, in addition to the traditional potatoes vegetables and fruits.

JASA 400C

PDS-JASA400CQP-EN-2023-11



**Cleanability**

**Quick and flexible changeovers**

**Enhanced (operator) safety**

**Energy-efficient and reliable**

**Higher processing speeds**

**Easy maintenance and servicing**

Energy efficient

Packaging material savings

Lower air consumption

Higher capacity

Quick Changeovers

AVAILABLE OPTIONS	JASA 400C
Film splice module with tape unit	V
Film splice module with sealing unit	V
Thermo transfer printer	V
Label applicator	V
Perforator module	V
Driven roll	V
Photo eye - detection blocked funnel	V
MAP connection	V
Horizontal sealing system - heatseal	V
Horizontal sealing system - multiseal	V
Horizontal sealing system - multiseal handgrip	V
Side gusset module	V
Airpress unit	V
Heating electrical cabinet (*)	V
RFID tag for user login	V

ACCESSOIRES	
Lift for forming set and film roll	V
Forming set storage	V


### BAG STYLES



### BAG SIZES

Bag width, centric sealed (mm)	180-400
Bag width, excentric sealed (mm)	180-320
Bag length, in one sealstep (mm)	450 at IM

PACKAGING MATERIALS	JASA 400C
Polyethylene	V
Polypropylene	V
Laminated film	V
Heatsealable paper	V
Pre-sealed film-net combination	V

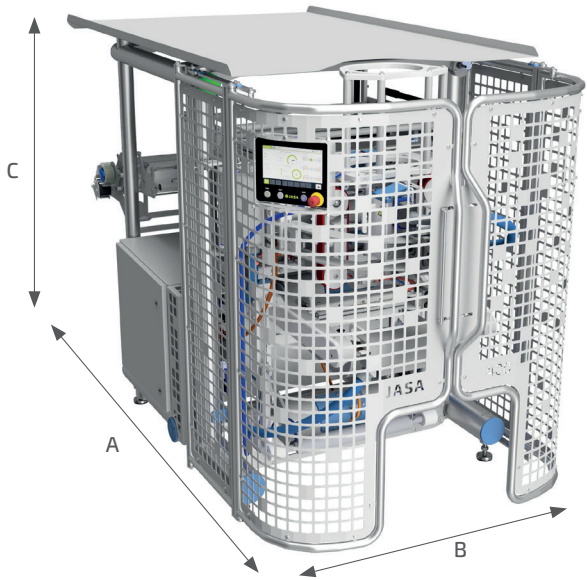

DIMENSIONS*	JASA 400C
Max. length (A) (mm)	2715
Max. width (B) (mm)	1420
Max. height (C) (mm)	1.930
Max. Outside diameter film reel (mm)	600

\*Exact dimensions depend on the final configuration of the machine.