

JASA Packaging Solutions stands for innovation, quality and flexibility in packaging technology. We specialize in developing and manufacturing vertical packaging machines, sleeves and complete weighing and packaging lines. Producers and packers of all kinds of food products around the globe trust our expertise, for almost 40 years, 24/7.



PRODUCT DATA SHEET

JASA 400X

MODEL	JASA 400X
Mechanical capacity** (pack./min.)	120
Changeover time (min.)**	5-7
Electrical capacity (kW)	6
Electrical requirements	3x400VAC+N+PE, 50HZ (Europe standard) USA upon request
Necessary air pressure (bar)	6
Pneumatic capacity* (l/min.)	140
Compressed air specifications	ISO 8573-1:2010[7:4:4]
IP rating machine	IP66 or IP54
Sound pressure (dB(A))	78
Sound power lever (dB(A))	93
EC declaration	yes
Country of origin	the Netherlands
Customs tariff code	84223000

Packaging dimensions* (L*W*H)(mm)	3750 x 1.500 x 2.100
Nett weight* (kg)	1750
Packaging weight (kg)	1900

Film roll - max weight (kg)	60
Film roll - max diameter (mm)	600
Machine configuration	left/right

* Exact capacity, dimensions and weight depend on the implementation of the machine.


** The achieved capacity in the field depends on the actual product & film type and properties, bag length, portion size, infeed method operator efficiency and environmental conditions.



Headoffice:
Visiting adress: Butter 17, 1713 GM Obdam (NL)
Mailing & delivery: Kwelder 1, 1713 GN Obdam (NL)
T +31 72 561 27 00
E sales@jasa.nl
W www.jasapackaging.com

All data, products and productspecifications are intended for general information only and subject to change without notice.

JASA 400X as part of the NXXT family is revolutionary, innovative and modular. Our customers most desired machine improvements: cleanability, flexible, fast changeovers, improved operator safety, energy efficient, faster processing speeds, serviceability.

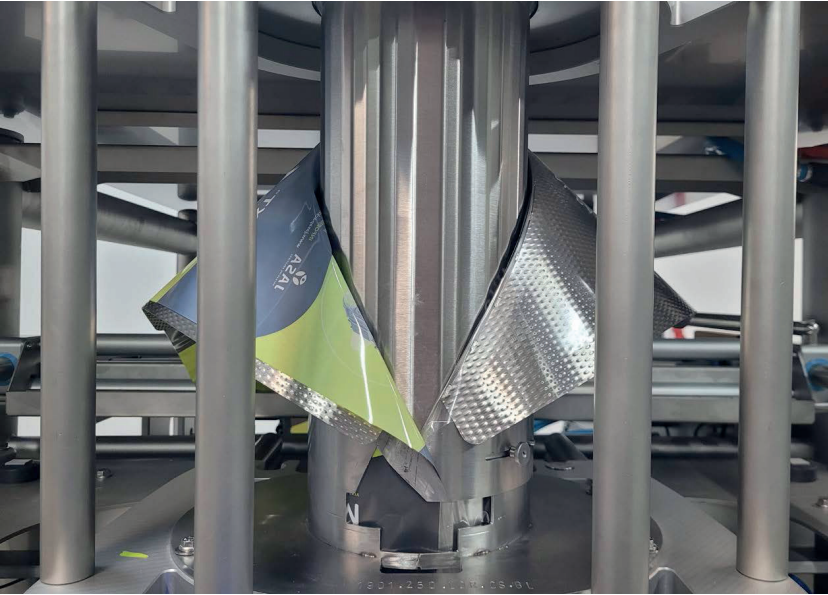

Efficient Packaging for Fresh Products
Designed for a wide range of fresh foods, ensuring optimal freshness, quality, and efficiency.

JASA 400X

PDS-JASA400XP-EN-2023-11

