

JASA Packaging Solutions stands for innovation, quality and flexibility in packaging technology. We specialize in developing and manufacturing vertical packaging machines, sleeves and complete weighing and packaging lines. Producers and packers of all kinds of food products around the globe trust our expertise, for almost 40 years, 24/7.

MODEL	JASA 400X QP
Mechanical capacity** (pack./min.)	75
Changeover time (min.)**	5-7
Electrical capacity (kW)	6
Electrical requirements	3x400VAC+N+PE, 50HZ (Europe standard) USA upon request
Necessary air pressure (bar)	6
Pneumatic capacity* (l/min.)	140
Compressed air specifications	ISO 8573-1:2010[7:4:4]
IP rating machine	IP66 or IP54
Sound pressure (dB(A))	78
Sound power level (dB(A))	93
EC declaration	yes
Country of origin	the Netherlands
Customs tariff code	84223000
Packaging dimensions* (L*W*H)(mm)	3750 x 1500 x 2100
Nett weight* (kg)	1950
Packaging weight (kg)	2100
Film roll - max weight (kg)	60
Film roll - max diameter (mm)	600
Machine configuration	left/right

* Exact capacity, dimensions and weight depend on the implementation of the machine.

** The achieved capacity in the field depends on the actual product & film type and properties, bag length, portion size, infeed method operator efficiency and environmental conditions.



Headoffice:
 Visiting address: Butter 17, 1713 GM Obdam (NL)
 Mailing & delivery: Kwelder 1, 1713 GN Obdam (NL)
 T +31 72 561 27 00
 E sales@jasa.nl
 W www.jasapackaging.com




All data, products and productspecifications are intended for general information only and subject to change without notice.



PRODUCT DATA SHEET **JASA 400X QP**

The **JASA 400X QP**, part of the NXXT family, is revolutionary, innovative, and modular. It incorporates the most desired machine improvements based on customer feedback: enhanced cleanability, flexible and fast changeovers, improved operator safety, energy efficiency, higher processing speeds, and improved serviceability.

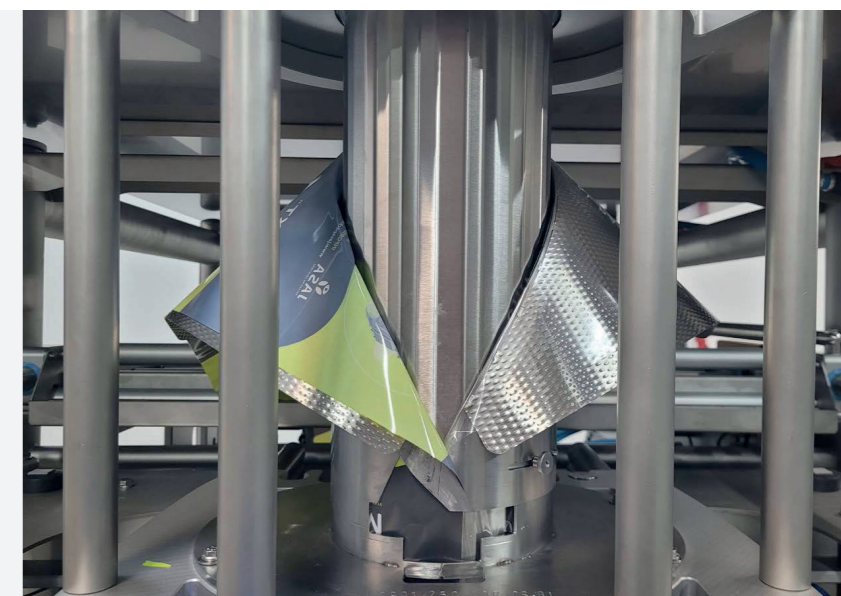

Efficient Packaging for Fresh Products
 Designed for a wide range of fresh foods, ensuring optimal freshness, quality, and efficiency.

JASA 400X QP

PDS-JASA400XQP-EN-2023-11



Cleanability

Flexible, fast changeovers

Improved (operator) safety

Saving and reliable

Faster processing speeds

Serviceability



Energy efficient



Packaging material savings



Lower air consumption



Higher capacity



Quick Changeovers

BAG STYLES



Pillowbag Gusseted bag Carry-Fresh Carry-bag Doy style Blockbottom


BAG SIZES

Bag width, centric sealed (mm)	180-350
Bag width, excentric sealed (mm)	180-320
Bag length, in one sealstep (mm)	450 at IM

PACKAGING MATERIALS	JASA 400X QP
Polyethylene	V
Polypropylene	V
Laminated film	V
Heatsealable paper	V
Pre-sealed film-net combination	V
Separate film and CLAF or extruded net	V

AVAILABLE OPTIONS	JASA 400X QP
Second film unwind	V
Quickpack module	V
Film splice module with tape unit	V
Film splice module with sealing unit	V
Printer	V
Label applicator	V
Perforator module	V
Driven roll	V
Photo eye - detection blocked funnel	V
MAP connection	V
Horizontal sealing system - heatseal	V
Horizontal sealing system - multiseal	V
Horizontal sealing system - multiseal handgrip	V
Side gusset module	V
Airpress unit	V
Heating electrical cabinet (*)	V
RFID tag for user login	V

ACCESSOIRES	JASA 400X QP
Lift for forming set and film roll	V
Forming set storage	V

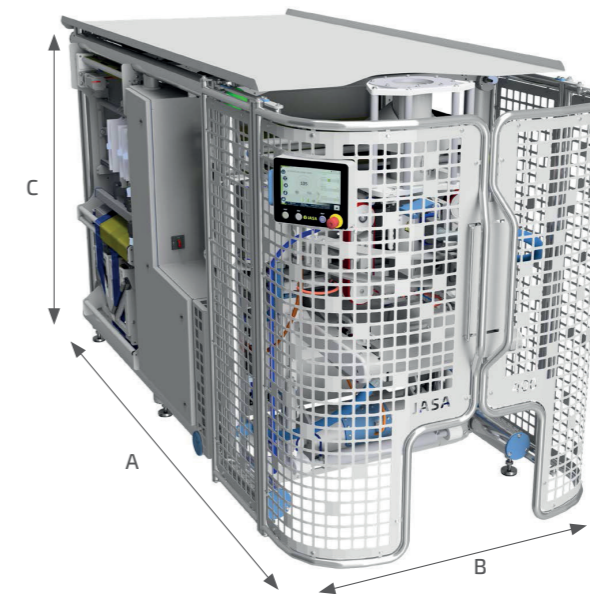

DIMENSIONS*	JASA 400X QP
Max. length (A) (mm)	3333
Max. width (B) (mm)	1420
Max. height (C) (mm)	1.930
Max. Outside diameter film reel (mm)	600

*Exact dimensions depend on the final configuration of the machine.